


J200A



AUTOMATIC BOLLARD

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC UNIT
- FORMWORK AND STRUCTURE HOT DIP GALVANIZED
- LED INCLUDED
- SQUARE LOCK 10X10
- 400 mm BURIED TUBE
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

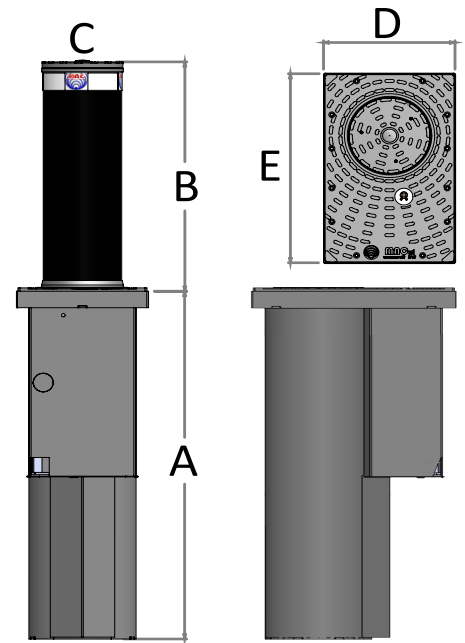

U.M. = mm				
A	B	C	D	E
1254	800	275	328	508
1454	1000			

J200A		
THICKNESS OF THE TUBE	mm	12.5
DIAMETER OF THE TUBE	mm	200
MATERIAL OF THE TUBE		S335JRC
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT
TREATMENT FORMWORK AND STRUCTURE		HOT DIP GALVANIZATION
REFLECTIVE STRIP		•
RESISTANCE TO BREAKAGE	J	380.000
RESISTANCE TO DEFORMATION	J	115.000
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000
DAILY CYCLES INTENSIVE USE		2.400
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE		1.500.000
MAXIMUM PRESSURE OF WORK	bar	30
CAPACITY OF THE PUMP	L	5
DEGREE OF PROTECTION OF THE PUMP	IP	67
POWER ABSORBED	W	500
POWER SUPPLY	Vac	230V 50HZ
POWER SUPPLY OF THE LED	Vdc	24
TEMPERATURE OF WORK	°C	-20 / + 80
ROHS REQUIREMENTS		•

• = standard equipment

J200A H800		030951215
HEIGHT FROM THE GROUND	mm	800
RAISING TIME	sec	8,4
LOWERING TIME	sec	7,2
WEIGHT	Kg	165

J200A H1000		030951217
HEIGHT FROM THE GROUND	mm	1.000
RAISING TIME	sec	10,5
LOWERING TIME	sec	9,4
WEIGHT	Kg	190