
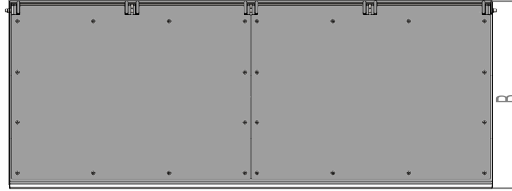


TITANO

HYDRAULIC ROAD BLOCKER

- FORMWORK
- HYDRAULIC CYLINDER
- LED
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

A	B	C	D	E
L +15	844	580	L -23	350
L +15	844	580	L - 23	500
L + 26	1176	815	L - 36	700
L + 26	1650	1200	L - 36	1000

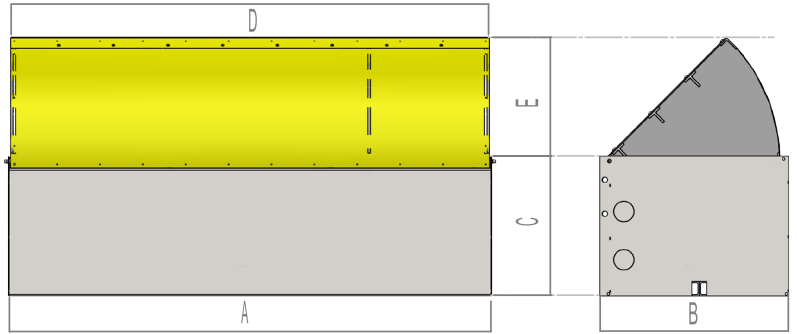

MODEL		TITANO 350	TITANO 500	TITANO 700	TITANO 1000
MATERIAL MOVING PLATE				FE 360	
FINISH MOVING PLATE				POWDER PAINT	
PROCESSING MOVING PLATE, FORMWORK AND EXT. STRUCTURE				HOT DIP GALVANIZATION	
REFLECTIVE STRIP				•	
BREAKOUT RESISTANCE	J	800.000	1.000.000	1.800.000	2.200.000
IMPACT RESISTANCE	J			10.000	
STATIC RESISTANCE BOLLARD OPEN (CERTIFIED)	KG			40.000	
DAILY CYCLES INTENSIVE USE (INTERMITTENT CYCLE S3)				2.400	
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE				1.500.000	
MAXIMUM PRESSURE OF WORK	BAR		30		40 - 80
BUILT-IN HYDRAULIC PUMP			•		OPTIONAL
DEGREE OF PROTECTION OF THE PUMP	IP		67		55
POWER ABSORBED	W		500		1100 - 3000
POWER SUPPLY	VAC		230V 50 HZ		380V 50 HZ
POWER SUPPLY OF THE LED	VDC			24	
TEMPERATURE OF WORK	°C			-20 / + 80	
ROHS REQUIREMENTS				•	
HEIGHT OF THE ROAD BLOCKER	MM	350	500	700	1000
SPEED OF ASCENT	SEC		3		10
SPEED OF DESCENT	SEC		2		7

• = standard equipment

L	350	500	700	1000
1000 mm	0351101110	0351201110		
Kg	150	190		
2000 mm	0351101120	0351201120	0352401120	0352701120
Kg	230	405	725	
3000 mm	0351101130	0351201130	0352401130	0352701130
Kg	340	580	1.085	
4000 mm	0351101140	0351201140	0352401140	0352701140
Kg	460	770	1.175	
5000 mm	0351101150	0351201150	0352401150	0352701150
Kg	570	950	1.825	
6000 mm	0351101160	0351201160	0352401160	0352701160
Kg	680	1.140	2.170	